GC0617D INSTRUCTION BOOK / PARTSLIST




DIRECT DRIVE AUTO-LUBRICATION COMPOUND FEED LOCKSTITCH SEWING MACHINE



CONTENTS

Operation Instruction	
1、Brief introduction	1
2. Machine specification	1
3. Installing the oil pan and safety switch magnet	1
4. Installing the machine head	2
5. Installing the knee lifter assy	2
6. Adjusting the knee lifter	3
7、Lubrication	3
8、Test operation	4
9. Installing the needle	5
10、Removing the bobbin case	5
11、Winding the bobbin thread	5
12、Threading the bobbin thread	6
13、Threading the needle thread	6
14、Adjusting the stitch length	7
15、Sewing and backtacking	7
16、Adjusting the thread tension	8
17、Adjusting the presser foot pressure	8
18、Adjusting the thread tension spring	
19、Adjusting the upper thread guide	10
20、Adjusting the presser foot height	
21. Adjusting the feed dog height	
22、Adjusting the feed dog angle	
23. Adjusting the difference of stitch length between the forward and backtacking	
24、Adjusting the tension release	
25. Adjusting the timing of needle and feed mechanism	
26、Adjusting the rotary hook lubrication amount	
27、Adjusting the height of needle bar and the timing with hook	13
28. Adjusting the oil pump	13
29. Adjusting the lifting amount of presser feet	14
1. Casting mechanism	15
3. Presser foot mechanism	
4. Feed mechanism	
5. Upper feed mechanism	
6. Hook mechanism	
7、Lubrication mechanism	
8、Accessories	32 ~ 33

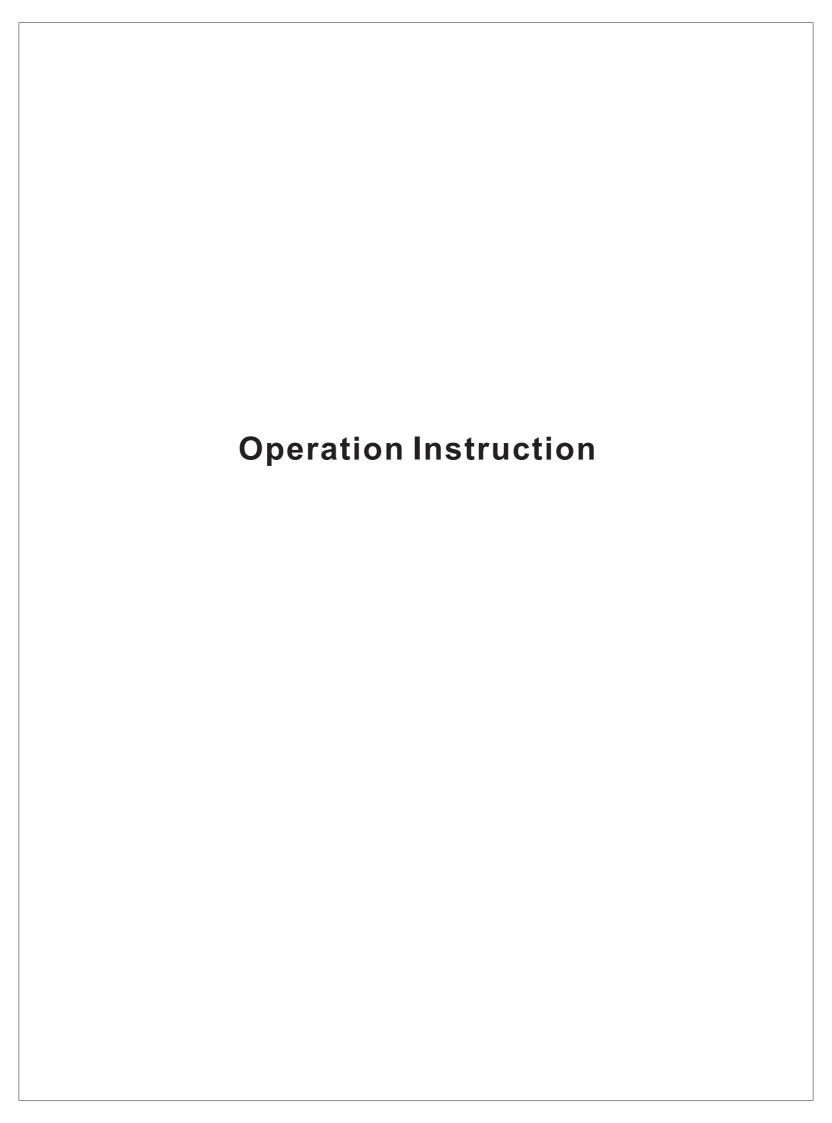

1. Brief introduction


This machine is designed with link type feed mechanism and link lever thread take-up mechanism and full lubrication by pump. It's suitable for sewing leather, canvas and other heavy weight materials, such as suitcase, car seat, tent, sofa, etc.


2. Main specifications

Applications		Medium & heavy weight materials
Max sewing spe	ed	1800 s.p.m
Max stitch lengt	h	7mm
Needle bar strok	ке	37mm
Lifting amount of pro	esser feet	3.5-5.5mm
Needle		DP×17 23#
Presser foot	By hand	7mm
lifting height	By knee	15mm
Hook		Large lubrication hook
Lubrication		Automatic lubrication
Motor output		750W

3. Installing the oil pan and safety switch magnet (Fig.1)


- 1.Insert the two head cushion 2 into the front corners of the oil pan 1;
- 2.Insert the two head cushion 3 into the back corners of the oil pan 1;
- 3. Place the oil pan4 into the cutouts of table;
- 4.Insert the two rubber cushion **5** into the notches of table.
- 5.Insert the safety switch magnet into the hole of the table near oil pan cutout.

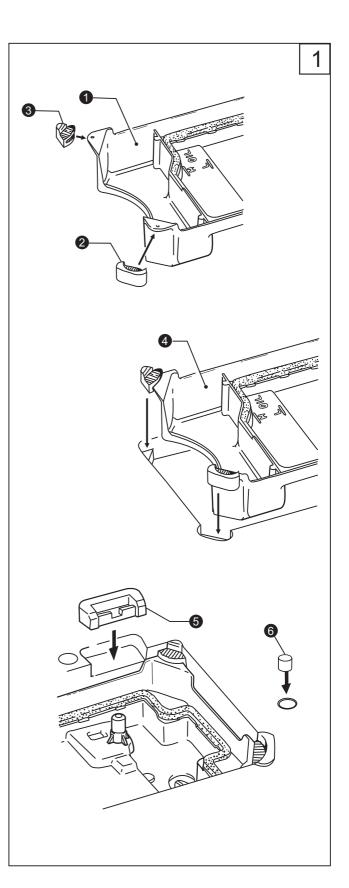

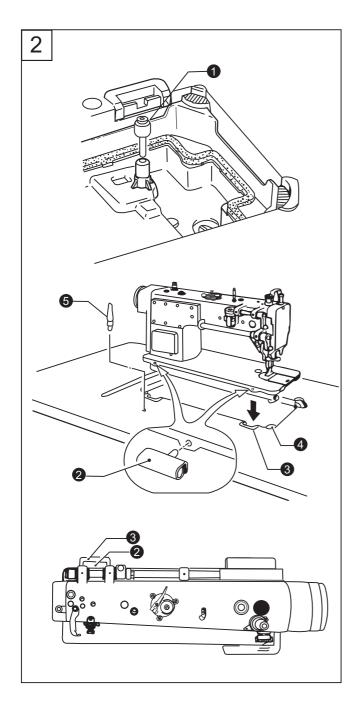

- 4. Installing the machine head (Fig.2)
- 1.Insert the knee lifter lifting bar 1.
- 2.Insert the two hinges 2 into the holes in the machine bed.
- 3. Clamp the two hinges onto the rubber cushions 3 in the work table, and the place the machine head onto the head cushions 4 which are on the top of the oil pan corners.
- 4. Tap the rest bar **5** into the table hole.

NOTE: Tap the rest bar securely into the table hole, if not, the machine head will not be safe when it is tilted back.

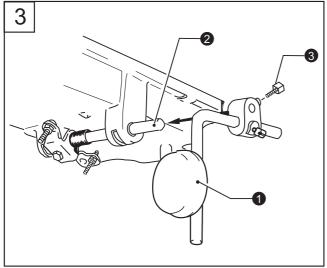


5. Installing the knee lifter assy. (Fig.3)

Insert the knee lifter assy. 1 into the shaft 2 under the oil pan, and slightly tight the screw 3.

6. Adjusting knee lifter(Fig.4)

- 1.Lower the presser foot **2** by turning the presser foot bar lifter **1**.
- 2.Loosen the nut 3.
- 3. Turn the screw **6** to adjust the bracket **5** to 2mm play.
- 4. Securely tighten the nut 3.
- 5.Loosen the nut 7.
- 6. Turn the screw **8** until the distance between the end of the screw and bracket is approximately 8mm.
- 7. Turn the adjusting screw **8** to adjust, so that the presser foot is at the desired position within a distance of 16mm above the needle plate when the knee lifter plate **7** is fully pressed.
- 8. After adjustment, tighten the nut

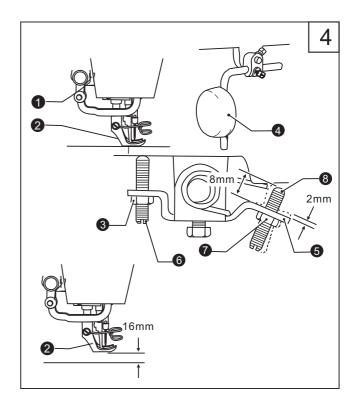

7. Lubrication(Fig.5)


1.Oil amount


Please fill the oil according to the mark indicated on the oil pan. Mark (A) means the highest position. Mark (B) means the lowest position. If the oil amount is lower than the Mark (B), oil will not be pumped and machine will be jammed.

2.Fill the oil

Please fill the 18# sewing oil into the oil pan until to the Mark (A)

- 3. Change the oil
- ①Uninstall the screw (C), and drain out the used oil
- ②Clean the oil pan, and tighten the screw (C), fill the fresh oil again according the requirement.

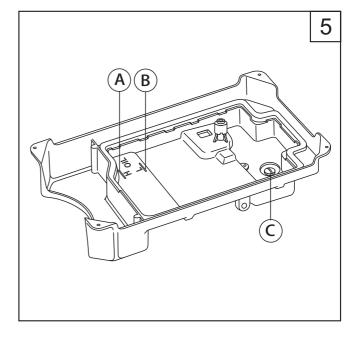

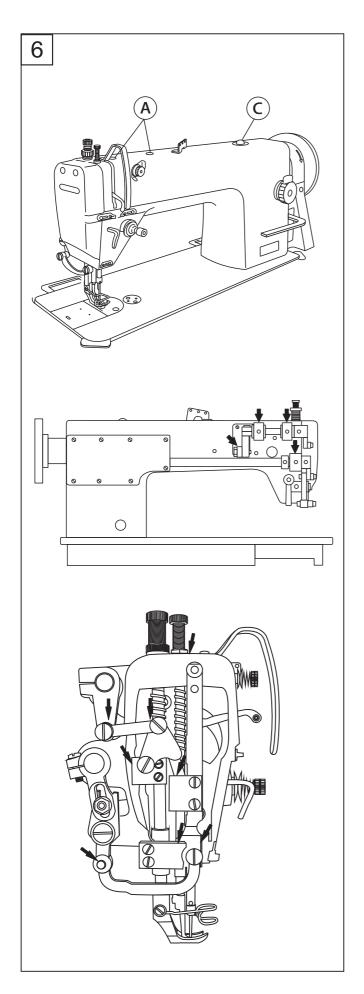

8. Test operation(Fig.6)

Carry out the test operation when start up a new sewing machine for the first time, or restart after a long period of non-use.


Remove the rubber cap (A) on the top of the arm and face plate, fully lubricate the parts showed by the arrows.

Install the face plate again, lift the presser foot and operate the machine at a lower speed of 1000-1500spm, and observe the oil running through the oil gauge window.

After one month, then the speed can be inc reased according to the different sewing operation.

9. Installing the needle (Fig.7)


- 1. Turn the machine pulley to move the needle bar 1 to its highest position;
- 2.Loosen the screw 2.
- 3.Insert the needle 3 in a straight line as far as it will go, making sure that the long groove on the needle is at the left, and then securely tighten the screw 2.

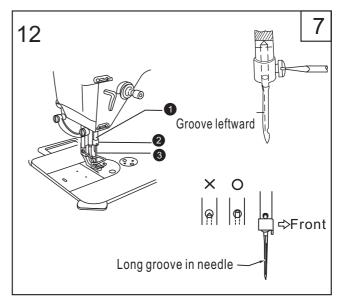

10. Removing the bobbin case(Fig.8)

1. Turn the machine pulley to lift the needle bar to its highest position. Pull the latch ① of the bobbin case upward and then put the bobbin into the bobbin case, finally insert the complete bobbin case with bobbin into the hook shaft.

2. To remove the bobbin case, pull the latch and draw the bobbin case out of the hook.

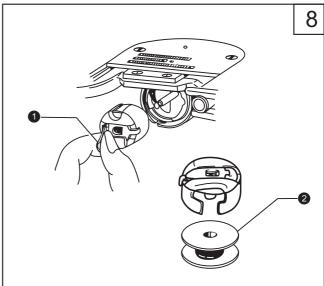



11. Winding the bobbin thread (Fig.9)

- 1. Turn the power on;
- 2.Place the bobbin onto the bobbin winder shaft 2;
- 3. Wind the thread several circles around the bobbin in the direction indicated by arrow:
- 4. Push down the bobbin presser arm 3;
- 5.Lift the presser foot;
- 6.Depress the treadle, the winding operation will start;
- 7.Once finished, the bobbin presser arm 3 will recover automatically.
- * If the thread winding is not neat and even, loosen the screw **4** to adjust the position of bobbin winder base.
- * Turn the screw **6** to adjust the bobbin winding amount
- Tighten the screw to increase the winding
- amount; Loosen the screw to decrease the winding amount.

Note:

The proper winding amount should be around 80% of the bobbin capacity.

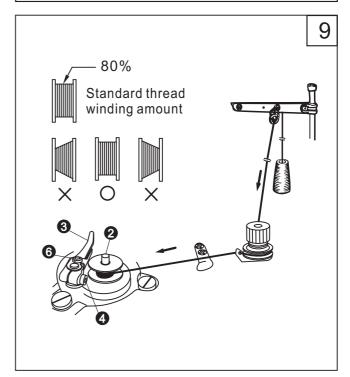

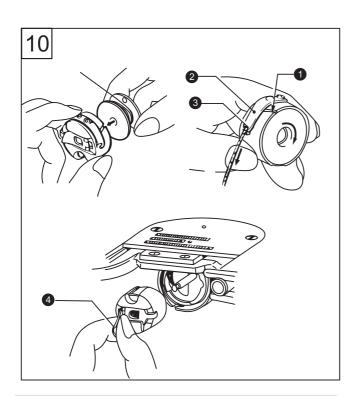


12. Threading the bobbin thread (Fig.10)

- 1. Turn the machine pulley to lift the needle to its highest position;
- 2. The bobbin thread should be right twist, place the bobbin into the bobbin case;
- 3. Pass the thread through the slot 1 and spring plate 2, and finally pull it out of the notch 3;
- 4. Check that the bobbin should turn clockwise if the thread is pulled;
- 5. Hold the latch **4**, and place the bobbin case in the hook.

13. Threading the needle thread (Fig.11)


Raise the thread take-up lever to its highest position. This will make threading easier and will prevent the thread from coming out at the sewing start.

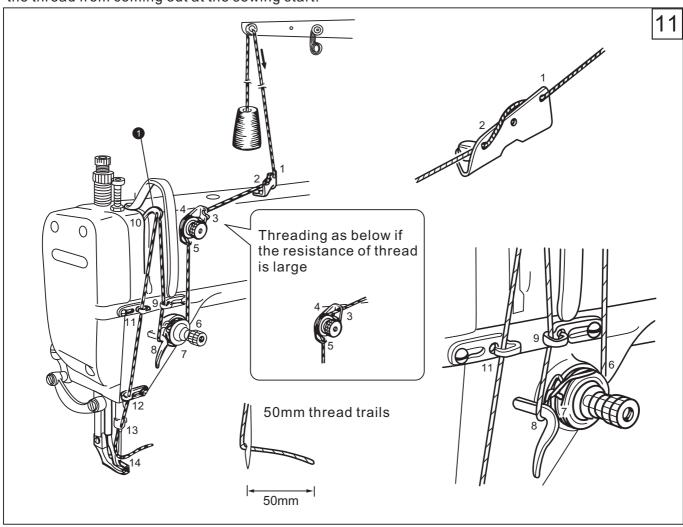

14. Adjusting the stitch length (Fig. 12)

While press the stopper 2, turn the stitch length dial 1 to make the number on the dial align with the mark on the stopper 2. The number is the stitch length in mm.


- ★The larger the number, the longer the stitch length will be.
- ★When turn the dial from a larger setting to a smaller setting, it will be easy to turn if the reverse lever ③ is pressed down.

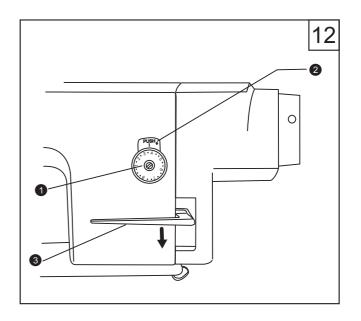


15. Sewing and backtacking (Fig. 13)


- 1. Turn the power on;
- 2. Depress the treadle to start sewing.

When the reverse lever 1 is pressed or the backtacking button is on during sewing, the feed will be reversed. After release, the feed will recover to normal.

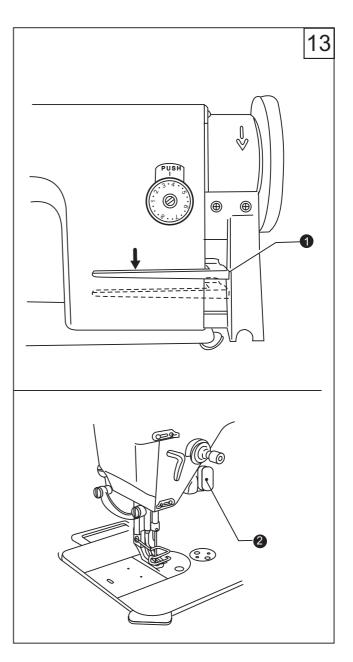

16. Adjusting the thread tension (Fig. 14)

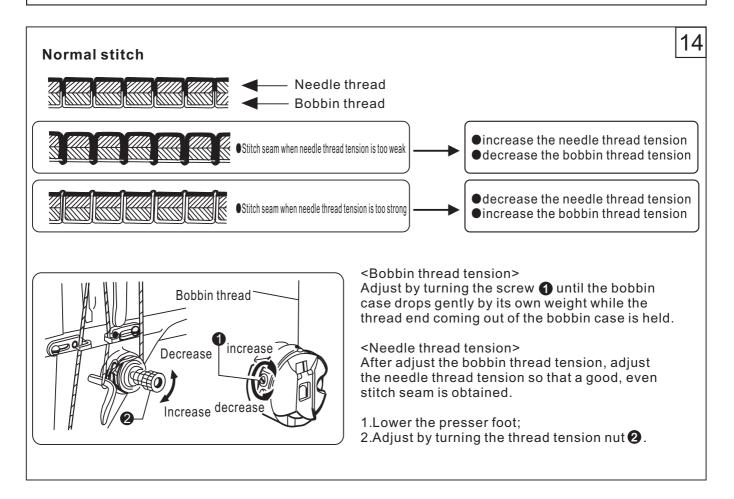

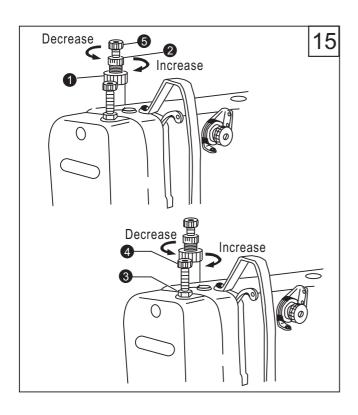

17. Adjusting the presser foot pressure (Fig.15)

<Adjusting the presser foot pressure>

1.Loosen the lock nut 1;

2. Turn the adjusting screw 2 to adjust the pressure of presser foot, if it's not enough, please turn the screw 5 to increase the pressure.

*The pressure should be as week as possible, but strong enough so that the material doesn't slip.

3. Tighten the nut 1.

<Adjusting the walking foot presser>

4. Loosen the nut 3;

5. Turn the screw **4** clockwise to increase the pressure, on the contrary, turn the screw **4** counterclockwise to decrease the pressure;

6. Tighten the nut 3.

18. Adjusting the thread tension spring (Fig. 16)

The standard position of the thread tension spring (a) is 5-8mm above the upper surface of the thread guide (3) when the presser foot (2) is lowered.


- 1.Lower the presser foot **2**;
- 2.Loosen the screw 4;
- 3. Turn the thread tension bracket **5** to adjust the spring position;
- 4. Tighten the screw 4.


The standard tension of the spring is 0.3-0.6N. 5. Push the needle thread with your finger until it is slightly higher than the thread tension bracket 3 and so that the upper thread is not pulled out; 6. Pull the needle thread down until the spring 1 is at the same height with the upper surface of thread guide 3, and then measure the tension of the spring.

7.Insert a screwdriver into the slot of the thread tension stud **6**, and turn the stud to adjust the tension of the spring **1**.

Note:

If using a tension gauge **7** to measure the tension, take the reading from the scale on the side of the red line.

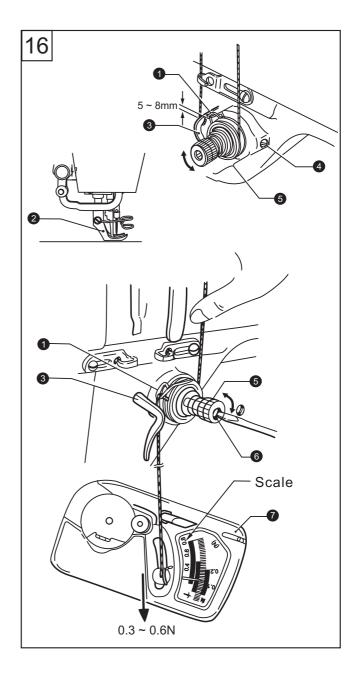

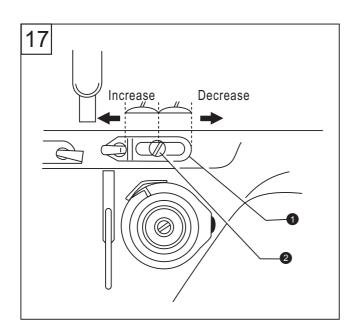

19. Adjusting the upper thread guide (Fig. 17)


The standard position of upper thread guide is where the screw 2 is in the center of the adjustable range of upper thread guide.

To adjust the position, loosen the screw 2 and

move the thread guide.

If stitch the heavy materials, move the thread guide leftward. (To increase the thread take-up tension)


If stitch the light materials, move the thread guide rightward. (To decrease the thread take-up tension)

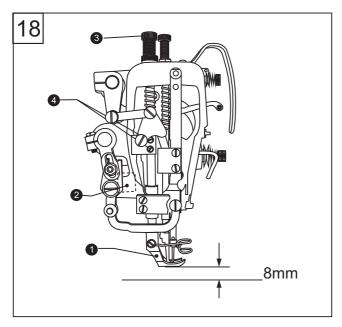

20. Adjusting the presser foot height(Fig. 18)

The standard height of presser foot **1** is 8mm when it is lifted by hand.

- 1.Loosen the screw 3 to lift the presser bar
- 2. Put a measurement gauge with 8mm height under the presser foot;
- 3.Loosen the screw **4** and adjust the height of presser foot;
- 4. Tighten the screw 4.

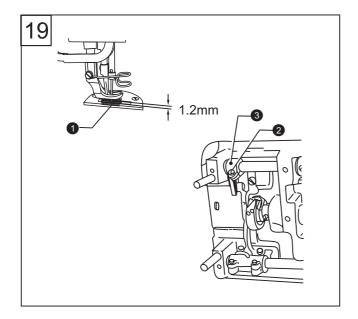

21. Adjusting the feed dog height (Fig. 19)


1. Set the stitch length maximum, when the feed dog 1 is at its highest position above the needle plate, the standard height is 1.2mm 2. Loosen the screw 2 and turn the feed lifting

arm 3 to adjust the height of feed dog.


22. Adjusting the feed dog angle (Fig. 20)

The standard angle of the feed dog is: when the feed dog is at its highest position above the needle plate, the Mark on the feed bracket shaft is on the horizontal position.

- 1. Turn the machine pulley to lift the feed dog to its highest position;
- 2.Loosen the screw 7;
- 3. Turn the feed bracket shaft in the direction of the arrow within a range of 90 with respect to the standard angle position.
- ★ In order to prevent puckering, lower the front of the feed dog (Fig. A)
- ★ In order to keep the materials straight, raise the front of the feed dog (Fig. B)
- 4. Securely tighten the set screw **7**. It's necessary to adjust the feed dog height again after this adjustment.

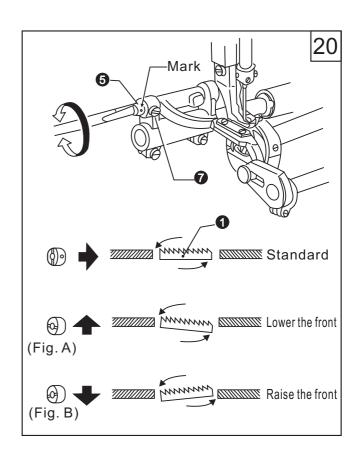

- 23. Adjusting the difference of stitch length between the forward and backtacking (Fig. 21)
- 1.Remove the back cover;
- 2.Loosen the screw **1** and turn the connecting stud **2**
- ★Turn the stud ② clockwise, the forward stitch length will be longer and the backtacking stitch length will be shorter;
- ★Turn the stud ② counterclockwise, the forward stitch length will be shorter and the backtacking stitch length will be longer;
- 3. Tighten the screw 1.

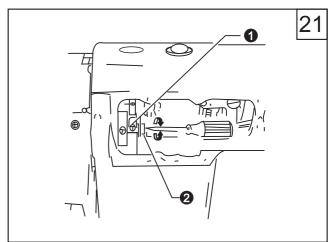


24. Adjusting the tension release (Fig. 22)


The opening time of the thread tension discs can be adjusted.

Remove the rubber cap on the rear of arm, and turn the screw 1, then the thread release cam 2 can be moved left or right.

Move the cam rightward, the release time will be slow

Move the cam leftward, the release time will be quick.

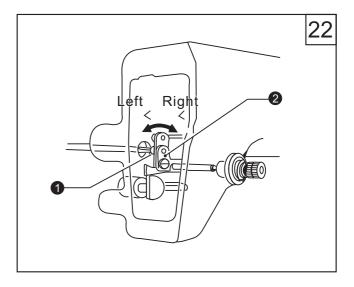

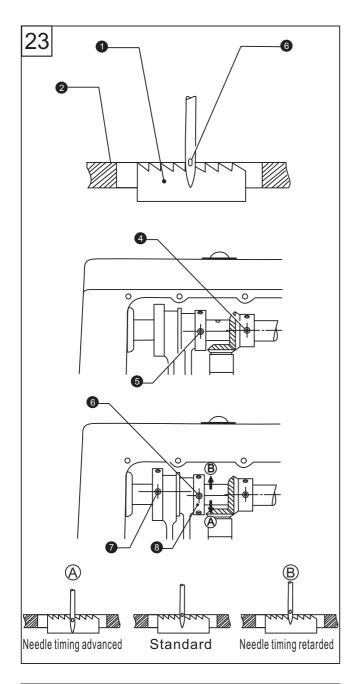

25. Adjusting the timing of needle and feed mechanism (Fig. 23)


The standard timing is when the feed dog is lowered from its highest position until it is flush with the top of the needle plate 2, and the needle eye 3 is also aligned horizontally with the surface. Adjust by changing the phases of feed cam and eccentric wheel UD

1.Remove the rear cover

- 2. Turn the machine pulley in reverse direction, set the second screw 4 on the gear of upper shaft as reference mark, make the third screw 5 of eccentric wheel UD slightly lower than the reference mark screw 4;
- 3.Continue to turn the machine pulley, set the second screw **6** of eccentric wheel UD as reference mark, make the third screw **7** of feed cam slightly higher than the reference mark screw **6**.
- 4.If need a non-timing position, loosen the three screws of eccentric wheel UD, adjust the eccentric cam 3 in the direction of arrow A or B To increase the tension of thread, turn the eccentric cam 3 to direction A

To avoid the needle bent, turn the eccentric cam **3** to direction **(B)**

5. After adjustment, tighten all of the screws.

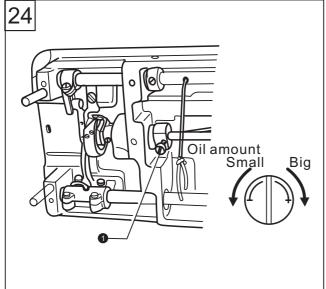

26. Adjusting the rotary hook lubrication amount (Fig. 24)

Tilt back the machine head, and turn the oil adjustment screw 1 to adjust the hook oiling amount.


27. Adjusting the height of needle bar and the timing with hook (Fig. 25)

When the needle bar 1 is at its lowest position, the top reference line (A) on the needle bar should be aligned with the bottom edge of the needle bar bush 2.

- 1. Turn the machine pulley to lower the needle bar to its lowest position;
- 2. Take out the rubber cap 3;
- 3.Loosen the screw 4, and move the needle bar 1 to proper position;
- 4. Tighten the screw 4;
- 5.Close the rubber cap 3.


Lift the needle bar 1 from the lowest position, when the second reference line (B) on the needle bar is aligned with the bottom edge of the needle bar bush 2, the tip 5 of the hook should be aimed at the center of needle 6.


- 1. Turn the machine pulley to raise the needle bar from its lowest position until the reference line (B) is aligned with the bottom edge of the needle bar bush (2)
- * When the needle bar moves up 2mm, the clearance between the upper of needle hole and the hook tip should be 1.3-1.8mm
- 2.Loosen the screw 7, and make the hook tip aimed at the center of needle 6, the clearance between the hook tip and needle should be 0.05mm 3.Tighten the screw 7.

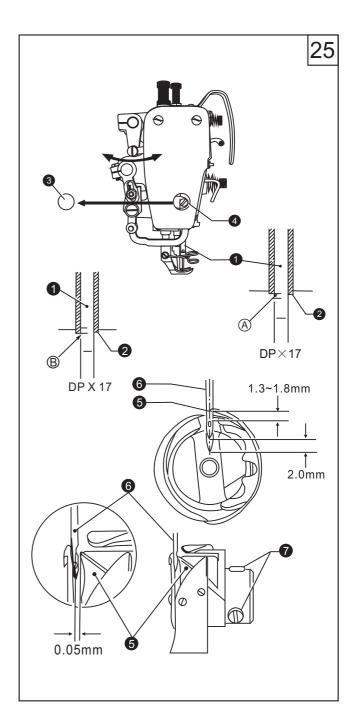

28. Adjusting the oil pump (Fig. 26)

If the oil is not circled observed from the oil gauge window at a lower sewing speed, turn the oil adjustment plate 1 to cover the oil hole.

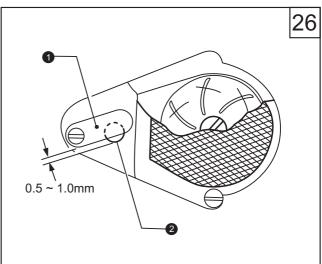

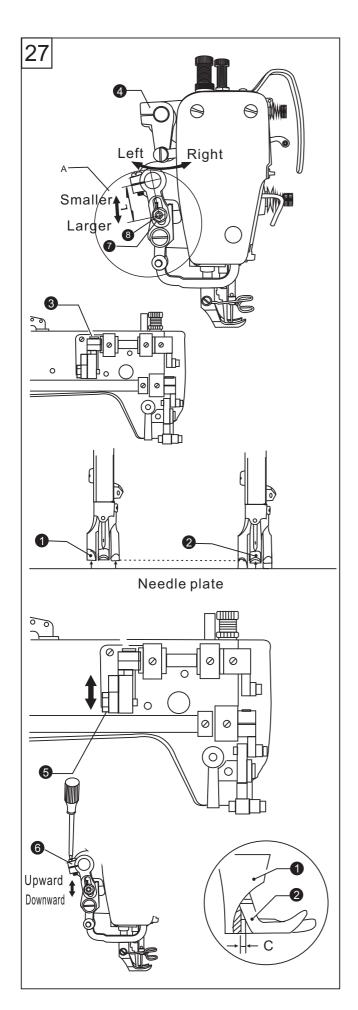

29. Adjusting the lifting amount of presser feet (Fig. 27)

1. Vertical movement of presser foot and walking foot ★ The presser foot 1 and walking foot 2 move vertically one after another

★ Usually the stroke of walking foot and presser foot is same or the stroke of walking foot is slightly lower. Place the thread take-up lever at the lowest position, and lower the presser bar lifter, loosen the screw 3 and move the upper feed lifting cam 4.

Move it rightward to make the stroke of two feet be equal

Move it leftward to make the stroke of presser foot be smaller.

2. Adjusting the lifting amount of presser feet Adjust the lifting amount of two feet to match the materials to be sewn.

Loosen the screw **5**, and move the screw upward to increase the lifting amount or move the screw downward to decrease the lifting amount.

3.Adjusting the forward/backward clearance of the two feet

To keep the front groove of presser foot not strike the rear of the walking foot, the clearance of C must be kept about 3mm.

Loosen the screw of feed arm R, and then turn the feed rock shaft **6** to adjust.

4.Adjusting the feed amount of walking foot(Fig. A)

★ The standard ration of feed amount between feed dog and walking foot is 1:1

The feed amount of walking foot can be adjusted to suit for the materials to be sewn.

Loosen the nut **7**, and move the slide block **8**Upward: decrease the distance L to make the feed amount be smaller


Downward: increase the distance L to make the feed amount be larger

30.Clean (Fig. 28)

- 1.Raise the presser foot;
- 2.Remove the two screws 1 and needle plate 2;
- 3.Clean the feed dog with a soft brush;
- 4.Install the needle plate 2 by two screws 1.


- 5. Turn the machine pulley slowly and check if the needle drops into the hole center of needle plate
- ★ If not
- Check if the needle is bent
- ●Loosen the screw 1, and reinstall the needle plate 2
- 6. Turn the machine pulley and lift the needle above the needle plate, check if the needle tip is blunt, if yes, change a new one.
- 7. Tilt back the machine head
- 8.Remove the bobbin case 4
- 9.Clean the hook with a soft cloth and check if the hook is worn out
- 10. Take out the bobbin from the bobbin case, and clean the bobbin case with a soft cloth
- 11.Insert the bobbin into the bobbin case and place the bobbin case back into the machine

12.Clean the dust on the filter (A) of oil pump.

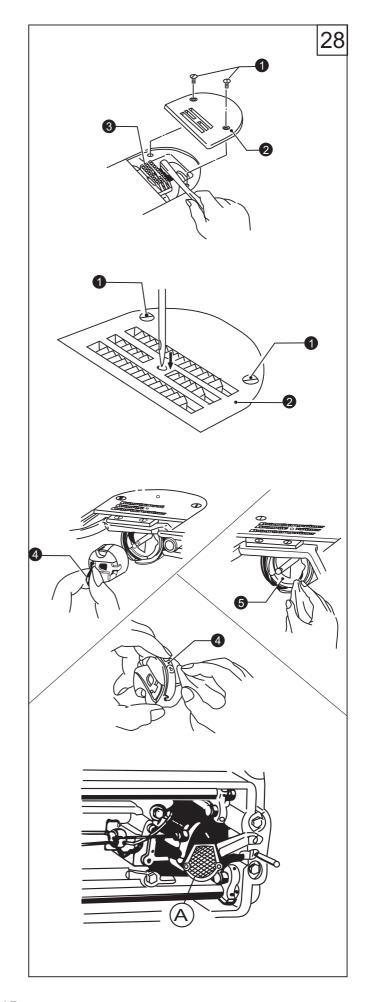




1. Casting mechanism

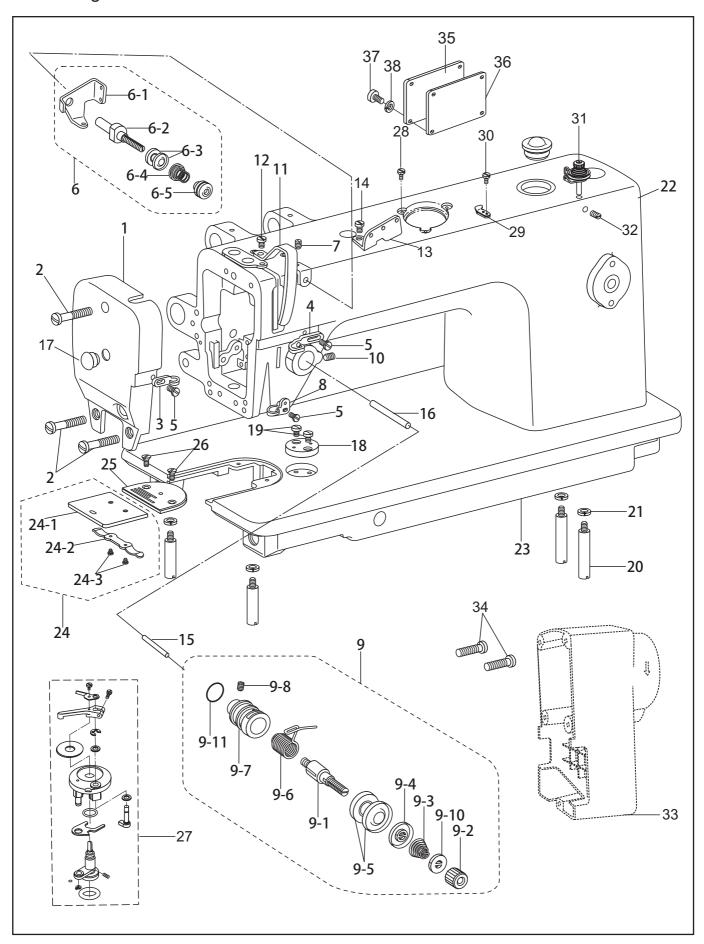

1. Casting mechanism

No.	Part Number	Name	Qt.	Remark
1	251WF1-002	Face plate	1	
2	22T1-004	Screw	2	
3	22T1-003C5	Thread guide	1	
4	22T1-014	Thread guide	1	
5	22T1-003C6	Screw	3	
6	36T2-006D	Thread guide assy.	1	
6-1	36T2-006D1	Thread guide	1	
6-2	36T2-006D2	Pre-tension stud	1	
6-3	22T2-009E3	Tension disc	2	
6-4	2KT2-011	Tension spring	1	
6-5	36T2-006D4	Adjusting screw	1	
7	20T1-004	Set screw	1	
8	7WF4-015	Thread tongion breaket appy		
9 9-1	33T4-008C 22T1-012F1	Thread tension bracket assy. Tension stud	1 1	
9-1	22T1-012F1 22T1-012F2	Tension nut		
9-3	33T4-008C1	Tension nat Tension spring	1 1	
9-4	22T1-012F4	Disc presser	1 1	
9-5	22T1-012F4 22T1-012F5	Disc, tension	2	
9-6	22T1-012F6	Thread take-up spring	1	
9-7	22T1-012F7	Thread tension bracket	1 1	
9-8	22T1-012F8	Set screw	1	
9-10	22T1-012F10	Stopper	1	
9-11	22T1-012F11	O ring	1	
10	22T1-013	Set screw	1	
11	1KT1-003	Cover	1	
12	22T2-004	Screw	1	
13	36T2-004	Thread retainer	1	
14	36T2-005	Screw	1	GB936发黑
15	2KT4-002	Tension release pin	1	
16	2KT4-003	Tension release stud	1	
17	7WF4-030	Rubber plug	1	
18	7WF4-005	Ruler plate	1	
19	1WF3-025	Screw	2	
20	7WF4-013	Bed leg	4	
21		Washer, spring	4	
22	284WF1-001	Arm	1	
23	7WF4-001	Bed	1	
24	714/5 4 000	Slide plate assy.	1	
24-1	7WF4-006	Slide plate	1	
24-2	20T1-013F2	Spring plate Screw	1	
24-3 25	20T1-013F3 92WF2-016	Screw Needle plate	2	
25	92VF2-016 22T1-020	Screw	2	GB/818 M5X25
27	258WF1-007	Bobbin thread winder assy.	1	GD/010 NI3V52
28	92WF2-027	Screw	3	
29	52WF2-043	Cutter	1	
30	36WF2-031	Screw	2	
31	258WF1-005	Bobbin thread tension assy.	1	
32	1WF5-019	Screw	1	
33		Motor cover	1	
34		Screw	5	
35	273WF1-005	Back cover	1	
36	273WF1-006	Seal -17-	1	
37	22T1-006	Screw	4	
38	22T1-007	Washer	4	


2. Needle bar and thread take-up mechanism

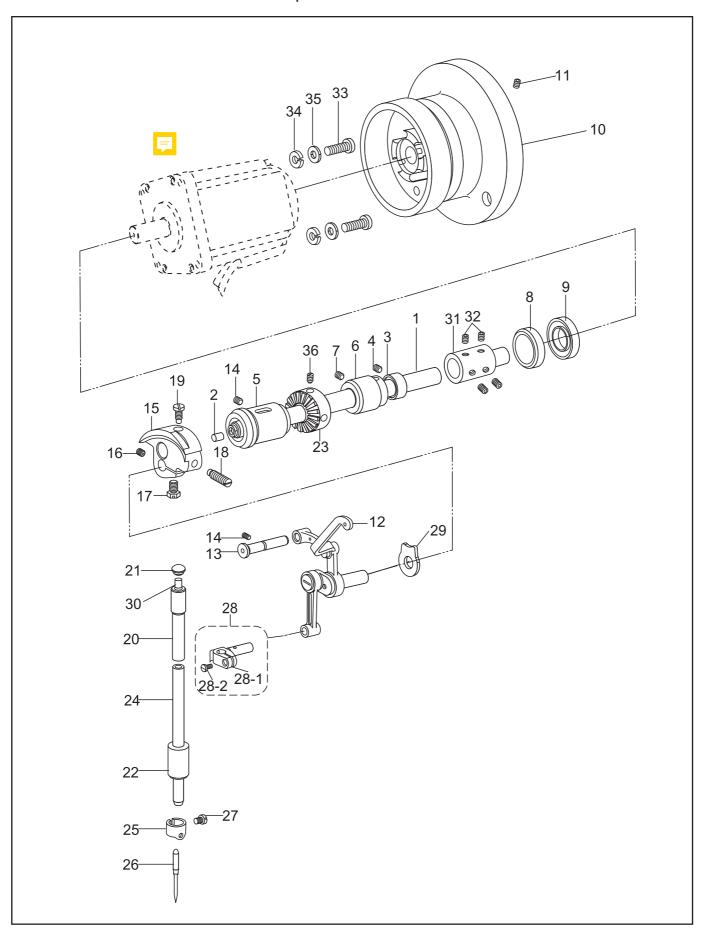

2. Needle bar and thread take-up mechanism


No.	Part Number	Name	Qt.	Remark
1	271WF2-001	Upper shaft	1	
2	22T3-001A2	Robber cap	1	
3	22T3-002B1	Collar	1	
4	22T3-002B2	Screw	2	
5	4WF1-006A	Bush, L	1	
6	4WF1-002	Bush, M	1	
7	J0.0.40	Set screw	1	φ20xφ42x12
8		Bearing, R	1	
9	258WF2-004	Oil seal	1	
10	273WF2-001	Hand wheel	1	
11	258WF2-007	Screw	2	
12	33T1-004B	Thread take-up lever set	1	
13	33T1-002	Support shaft	1	
14	J0.0.5	Set screw	2	
15	4WF1-007A	Thread take-up crank	1	
16	33T1-006C3	Screw	1	
17	22T2-005B3	Screw	1	
18	33T1-006C2	Screw	1	
19	20T2-007	Screw	1	
20	22T2-008	Bush, needle bar, upper	1	
21	22T2-011	Robber cap	1	
22	2KT1-002	Bush, needle bar, lower	1	DPX17 23#
23	258WF2-002	Friction wheel	1	
24	35T1-102	Needle bar	1	
25	35T1-103	Thread guide	1	
26		Needle	1	
27	22T2-017	Set screw	1	
28	35T1-101A	Needle bar clamp assy.	1	
28-1	35T1-101A1	Needle bar clamp	1	GB/T65 M5X20
28-2	22T8-001A9	Set screw	1	GB/T859 5
29	33T1-005	Washer	1	GB/T95 5
30	22T1-010	Felt	1	
31	258WF2-003	Shaft coupling	1	
32	19WF3-005	Screw	4	
33		Screw	4	
34		Spring washer	4	
35		Washer	4	
36	6K2-043	Screw	2	
			-	

3. Presser foot mechanism

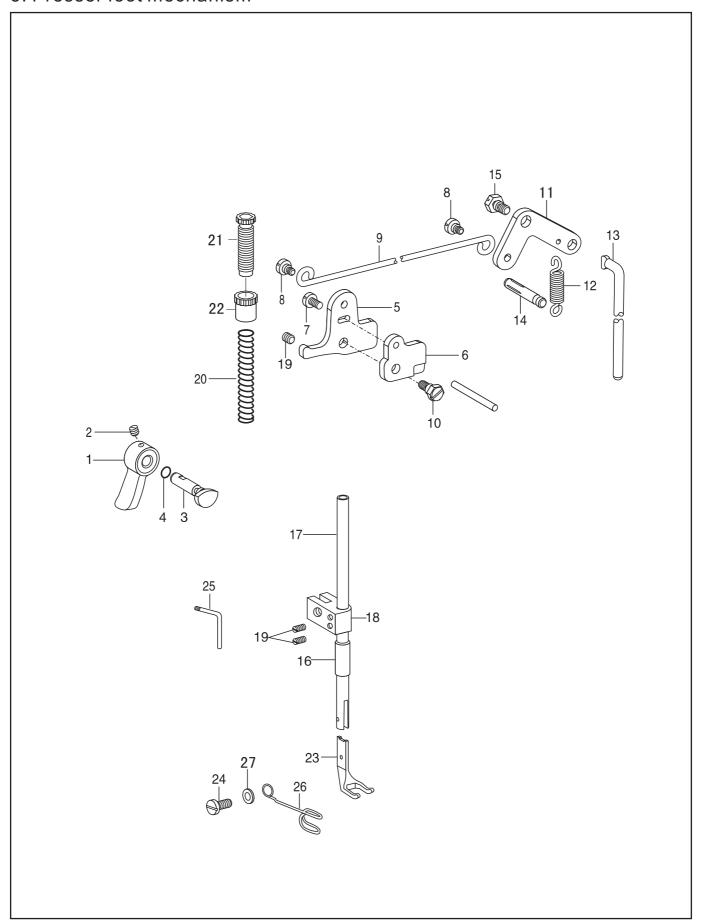

3. Presser foot mechanism

No.	Part Number	Name	Qt.	Remark
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 22 23 24 25 26 27	33T3-003 22T1-011 4WF3-002 22T7-004B1a 1KT4-005 22T7-004B2 1KT4-004 22T7-005A 22T7-007c2 4WF3-001 22T7-008 22T7-005B 34T3-305 35T3-302 251WF5-001 J0.0.40 34T3-302 1KT4-001 1KT4-002 35T3-304 22T8-012 35WF3-016 35WF3-017	Presser bar lifter Screw Lifter crank O ring Lifter lever Guide plate Screw Screw Collecting rod Screw Lever Spring, extension Knee lifter bar Spring hook Shoulder screw Bush Presser bar Guide bracket Screw Spring, compression Adjusting screw, presser Adjusting nut, presser Presser foot, inside Screw Thread guide Finger guard Washer	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	GB3452.1 4.5×1.8G 103940 103680

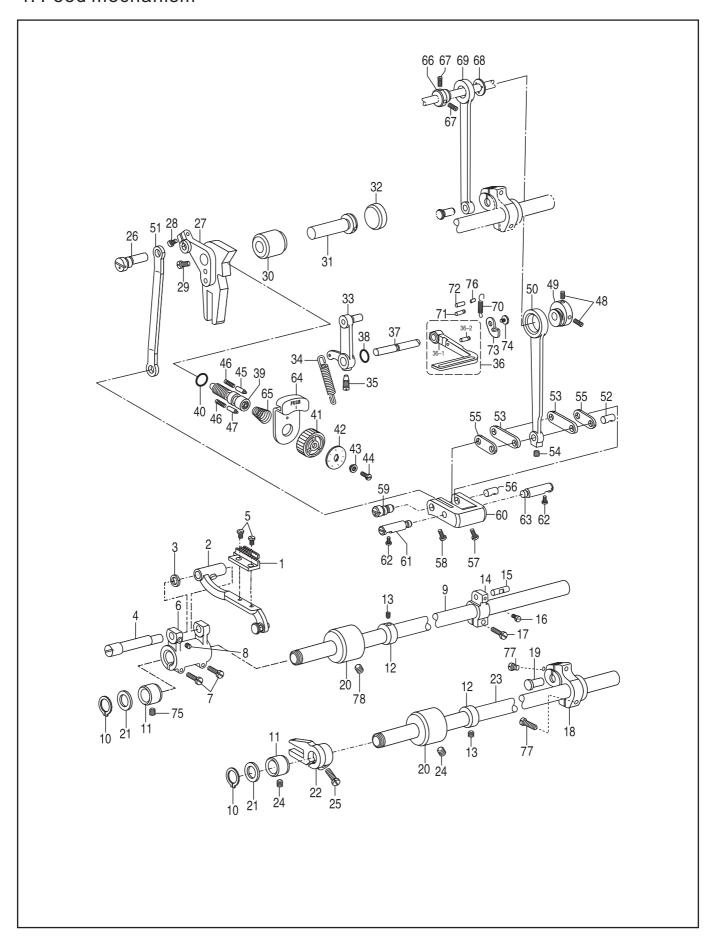


1	No.	Part Number	Name	Qt.	Remark
Saft	1	251ME4 004	Feed dog	4	
3			•	l l	
A	3				
5 J0.0.50 Screw 1 6 4WF2-002 Screw 1 7 61-04-01/B504 Feed rock arm 2 8 22T2-019 Screw 1 9 7WF2-004 Screw 1 10 Feed shaft 2 11 7WF2-002 Retaining ring 2 12 22T3-002B2 Bush, L 4 14 4WF2-006 Collar 1 15 82T2-003C1a10-2 Set screw 1 16 36T5-008Es Set screw 1 17 22T6-008B3 Set screw 1 18 68WF3-011 Set screw 1 19 22T6-007 Screw 2 21 51T5-013 Set screw 1 22 36T4-018Hrlb1 Pin 1 23 7WF2-001 Bush, M 1 24 J0.0.5 Washer 1 26 4WF2-012 Screw				I	
6 4WF2-002 Screw 1 7 61-04-01/B504 Feed rock arm 2 8 22T2-019 Screw 1 9 7WF2-004 Screw 1 10 TWF2-002 Feed shaft 2 11 7WF2-002B2 Retaining ring 2 13 22T3-002B2 Bush, L 4 14 4WF2-006 Collar 1 15 82T2-003C1a10-2 Set screw 1 16 36T5-008B3 Feed rocker arm 1 17 22T6-008D3 Set screw 1 19 22T6-007 Set screw 2 20 7WF2-003 Secw 2 21 51T5-013 Feed lifting arm 2 22 236T4-018H1D1 Bush, M 2 23 22T6-008D3 Feed lifting arm 1 26 4WF2-012 Shaft 1 27 7WF2-012 Shaft 1 28 </td <td></td> <td></td> <td>Shaft</td> <td>-</td> <td></td>			Shaft	-	
7 61-04-01/B504 Feed rock arm 2 8 22T2-019 Screw 1 9 7WF2-004 Screw 1 10 7WF2-002 Red shaft 2 12 22T3-002B1 2 13 22T3-002B2 Bush, L 4 14 4WF2-006 Collar 1 15 82T2-003C1a10-2 Set screw 1 16 36T5-008E5 Feed rocker arm 1 17 22T6-008D3 Stud 1 18 68WF3-011 Set screw 2 20 7WF2-003 Screw 2 21 51T5-013 Set screw 2 22 36T4-018H1D1 Pin 1 23 7WF2-001 Bush, M 2 24 40.5 Washer 2 25 22T6-008D3 Washer 1 26 2WF2-012 Shaft 1 27 7WF2-012 Shaft			Screw	I	
8 22T2-019 Screw 1 10 Feed shaft 2 11 7WF2-002 Retaining ring 2 12 22T3-002B1 Retaining ring 2 13 22T3-002B2 Bush, L 4 14 4WF2-006 Collar 1 15 82T2-003C1a10-2 Set screw 1 16 36T5-008E5 Feed rocker arm 1 17 22T6-008D3 Set screw 1 18 68WF3-011 Set screw 1 19 22T6-007 Screw 2 20 7WF2-003 Screw 2 21 51T5-013 Feed lifting arm 2 22 22T6-008D3 Feed lifting arm 2 25 22T6-008D3 Washer 1 26 4WF2-012 Screw 1 27 7WF2-001 Shaft 1 28 20T2-031 Screw 1 29 22T5-010D4 Screw 1 30 258WF4-002 Screw 1 31 22T5-004 Screw, L 1 36-1 2KT3-003 Shaft 1 36-1 2KT3-003 <t< td=""><td></td><td></td><td>Feed rock arm</td><td>-</td><td></td></t<>			Feed rock arm	-	
9					
10					
11	1			2	GB894 1 15
12	I	7WF2-002			0000111 10
13	1		Retaining ring		
15 82T2-003C1a10-2 16 36T5-008E5 17 22T6-008D3 18 68WF3-011 19 22T6-007 20 7WF2-003 21 51T5-013 22 36T4-018H ₁ D ₁ 23 7WF2-001 24 J0.0.5 25 22T6-008D3 26 4WF2-012 27 7WF2-012 28 20T2-031 29 22T5-010D4 30 258WF4-002 31 22T5-004 30 258WF4-003 33 7WF2-009 34 1KT3-002 35 22T5-013 36 2KT3-003 36-1 2KT3-003 37 2KT3-002 37 3GT5-007D ₂ 40 33T2-030-A 41 36T5-007D ₂ 42 4WF2-004A 43 36T5-007D ₅ 45 36T5-012 45 Set screw 1 1 5ed rocker arm 1 1 5tud 1 1 5et screw 2 2 2 5et screw 1 1 5ud 1 1	I	22T3-002B ₂	Bush, L		
16 36T5-008Es Feed rocker arm 1 17 22T6-008D3 Stud 1 18 68WF3-011 Set screw 1 19 22T6-007 Screw 2 20 7WF2-003 Screw 2 21 51T5-013 Feed lifting arm 2 22 36T4-018H1D1 Pin 1 23 7WF2-001 Bush, M 1 24 J0.0.5 Washer 2 25 22T6-008D3 Washer 1 26 4WF2-012 Feed lifting arm 1 27 7WF2-012 Shaft 1 28 20T2-031 Screw 1 30 2258WF4-002 Screw 1 31 22T5-0104 Screw 1 32 258WF4-003 Feed regulator 1 33 7WF2-009 Screw, L 1 35 22T5-013 Bush 1 36-1 2KT3-003 Shaft 1 36-2 2KT3-003b Reverse stitching lever<	14	4WF2-006	Collar	1	
17	15	82T2-003C1a10-2	Set screw	1	
17 22T6-008D3 Stud 1 18 68WF3-011 Set screw 1 20 7WF2-003 Screw 2 21 51T5-013 Feed lifting arm 2 22 36T4-018H1D1 Pin 1 23 7WF2-001 Bush, M 1 24 J0.0.5 Washer 2 25 22T6-008D3 Washer 1 26 4WF2-012 Feed lifting arm 1 27 7WF2-012 Shaft 1 28 20T2-031 Screw 1 29 22T5-010D4 Screw 1 30 258WF4-002 Screw 1 31 22T5-004 Screw 1 32 258WF4-003 Feed regulator 1 33 7WF2-009 Screw, L 1 34 1KT3-002 Screw, S 1 35 22T5-013 Bush 1 36-1 2KT3-003 Shaft 1 36-2 2KT3-003 Rubber cap 1 37 2KT3-002 Pin assy. Lever 1 39 36T5-007D1 Screw 1 40 33T2-030-A	16	36T5-008E5	Feed rocker arm	1	
18 68WH-3-011 Set screw 1 20 7WF2-003 Screw 2 21 51T5-013 Feed lifting arm 2 22 36T4-018H1D1 Pin 1 23 7WF2-001 Bush, M 1 24 J0.0.5 Washer 1 25 22T6-008D3 Washer 1 26 4WF2-012 Feed lifting arm 1 27 7WF2-012 Shaft 1 28 20T2-031 Screw 1 29 22T5-010D4 Screw 1 30 258WF4-002 Connecting stud 1 31 22T5-004 Feed regulator 1 32 258WF4-003 Feed regulator 1 33 7WF2-009 Screw, S 1 34 1KT3-002 Screw, S 1 36-2 2KT3-003a Shaft 1 36-2 2KT3-003b Rubber cap 1 40 33T2-030-A Reverse stitching lever assy. 1 40 33T2-	I	22T6−008D₃		1	
1	I			_	
21	1			1 .	
22 36T4-018H1D1 Pin 1 23 7WF2-001 Bush, M 1 24 J0.0.5 Washer 2 25 22T6-008D3 Washer 1 26 4WF2-012 Feed lifting arm 1 27 7WF2-012 Shaft 1 28 20T2-031 Screw 1 29 22T5-010D4 Screw 1 30 258WF4-002 Connecting stud 1 31 22T5-004 Screw 1 32 258WF4-003 Feed regulator 1 32 258WF4-003 Feed regulator 1 34 1KT3-002 Screw, S 1 35 22T5-013 Bush 1 36-1 2KT3-003 Shaft 1 36-2 2KT3-003b Rubber cap 1 37 2KT3-002 Pin assy. Lever 1 38 Spring, extension 1 39 36T5-007D2 Reverse stitching lever assy. 1 41 36T5-007D4 S	I			2	
TWF2-001	I		Feed lifting arm		
24 J0.0.5 Bush, M	I		Pin	1 -	
25	1		Bush, M	1	
25	I		Washer		
27	I		Feed lifting arm		
28	I		<u> </u>		
29	I				
30	I				
31	I			1	
32 258WF4-003 Feed regulator 1 33 7WF2-009 Screw, L 1 34 1KT3-002 Screw, S 1 35 22T5-013 Bush 1 36 2KT3-003 Shaft 1 36-2 2KT3-003a Shaft 1 37 2KT3-002 Pin assy. Lever 1 38 Spring, extension 1 6.3×1.8G GB3452.1-92 39 36T5-007D1 Screw 1 1 40 33T2-030-A Reverse stitching lever assy. 1 1 41 36T5-007D2 Reverse stitching lever 1 1 42 4WF2-004A Spring hook pin 1 1 43 36T5-007D5 Shaft 1 1 45 36T5-012 O ring 1 1 45 36T5-012 O ring 1 Adjusting screw 1 1	I		Connecting stud	i	
33 7WF2-009 Screw, L 1 34 1KT3-002 Screw, S 1 35 22T5-013 Bush 1 36 2KT3-003 Shaft 1 36-1 2KT3-003a Shaft 1 37 2KT3-003b Rubber cap 1 37 2KT3-002 Pin assy. Lever 1 38 Spring, extension 1 39 36T5-007D1 Screw 1 40 33T2-030-A Reverse stitching lever assy. 1 41 36T5-007D2 Reverse stitching lever 1 42 4WF2-004A Spring hook pin 1 44 36T5-007D5 Shaft 1 45 36T5-012 O ring 1 45 36T5-012 O ring 1 Adjusting screw 1 1	I		Feed regulator	i	
34 1KT3-002 Screw, S 1 35 22T5-013 Bush 1 36 2KT3-003 Shaft 1 36-1 2KT3-003a Shaft 1 36-2 2KT3-003b Rubber cap 1 37 2KT3-002 Pin assy. Lever 1 38 Spring, extension 1 39 36T5-007D1 Screw 1 40 33T2-030-A Reverse stitching lever assy. 1 41 36T5-007D2 Reverse stitching lever 1 42 4WF2-004A Spring hook pin 1 44 36T5-007D5 Shaft 1 45 36T5-012 O ring 1 Adjusting screw 1 1	I		Screw, L	1	
35 22T5-013 Bush 1 36 2KT3-003 Shaft 1 36-1 2KT3-003a Rubber cap 1 37 2KT3-003b Pin assy. Lever 1 38 Spring, extension 1 39 36T5-007D1 Screw 1 40 33T2-030-A Reverse stitching lever assy. 1 41 36T5-007D2 Reverse stitching lever 1 42 4WF2-004A Spring hook pin 1 43 36T5-007D5 Shaft 1 44 36T5-012 O ring 1 45 36T5-012 O ring 1 Adjusting screw 1 1	I		Screw. S	1	
36 2KT3-003 Shaft 1 36-1 2KT3-003a Rubber cap 1 36-2 2KT3-003b Pin assy. Lever 1 37 2KT3-002 Pin assy. Lever 1 38 Spring, extension 1 6.3×1.8G GB3452.1-92 39 36T5-007D1 Screw 1 1 40 33T2-030-A Reverse stitching lever assy. 1 14×2.4 42 4WF2-004A Spring hook pin 1 1 43 36T5-007D4 Shaft 1 1 44 36T5-007D5 Shaft 1 1 45 36T5-012 O ring 1 1 Adjusting screw 1 1 1	35	22T5-013	·	1	
36-1 2KT3-003a 36-2 2KT3-003b Rubber cap Pin assy. Lever 1 1 38 Spring, extension 1 6.3×1.8G GB3452.1-92 Screw Reverse stitching lever assy. 41 36T5-007D2 Reverse stitching lever 43 36T5-007D4 Spring hook pin 1 44 36T5-007D5 Shaft 1 36T5-012 Oring Adjusting screw	36	2KT3-003		1	
37 2KT3-003b 38 Spring, extension 39 36T5-007D1 Screw 40 33T2-030-A 41 36T5-007D2 Reverse stitching lever assy. 42 4WF2-004A 43 36T5-007D4 44 36T5-007D5 5 Spring hook pin 5 Spring hook pin 5 Spring hook pin 7 Shaft 7 Spring hook pin 7 Shaft 7 Shaft 7 Oring 8 Adjusting screw 1 Spring hook pin 1 Shaft 1 Adjusting screw	36–1	2KT3-003a		1	
38	1		•	1	
39	I	2KT3-002	•	1	
40	1		Spring, extension	1	6.3×1.8G GB3452.1-92
41 36T5-007D2 Reverse stitching lever assy. 1 42 4WF2-004A Reverse stitching lever 1 43 36T5-007D4 Spring hook pin 1 44 36T5-007D5 Shaft 1 45 36T5-012 O ring 1 Adjusting screw	1		Screw	1	
41	I		Reverse stitching lever assy.		14×2.4
43	I		•]	
44 36T5-007D5 Shaft 1 1 45 36T5-012 Oring 1 Adjusting screw			•		
45 36T5-012 O ring 1 Adjusting screw	1		. •		
Adjusting screw					
	45	0010-012		'	

Oring

Stitch length dial Stitch length plate


Support bush

Screw

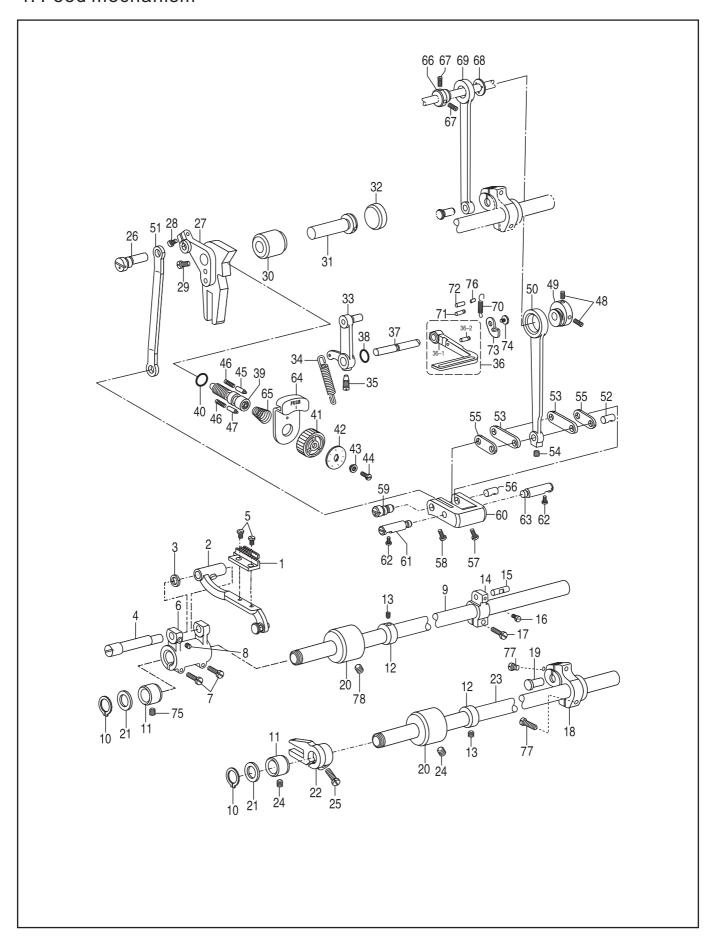

No.	Part Number	Name	Qt.	Remark
46	22T5-009	Spring	2	
47	7WF2-006	Stopper pin	1	
48	36T3-003D ₂	Set screw	3	
49	36T5-008E ₁	Feed cam	1	
50	4WF2-009A	Feed connecting rod	1	
51	4WF2-009B	Connecting rod	1	
52	82T2-003C1a10-1	Stud	1	
53	36T5-008E4H02	Link	2	
54	36T5-008E5	Set screw	1	
55	36T5-008E4H01	Link	2	
56	36T5-008E6	Shaft	1	
57	36T5-008E7	Screw	1	
58	36T5-008E8	Screw	1	
59	36T5-008E9	Shaft	1	
60	36T5-008E10	Feed regulator crank	1	
61	5WF1-002	Pin shaft, L	1	
62	22T6-008D3	Screw	2	
63	5WF1-001	Pin shaft, R	1	
64	7WF2-005	Stopper	1	
65	36T5-011	Spring	1	
66	36T3-003D₁	Eccentric wheel	1	
67	36T3-003D ₂	Screw	3	
68	36T3-004	Holder	1	
69	22T3-009D1C	Feed lifting rod	1	
70	2KT3-008	Spring	1	
71	2KT3-009	Spring hook	1	
72	2KT3-006	Pin	1	
73	2KT3-004	Plate	1	
74	2KT3-005	Screw	1	
75	J0.0.35	Screw	1	
76	2KT3-007	Pin shaft	1	
77	17WF4-021	Screw	1	
78	J0.0.40	Screw	1	

5. Upper feed mechanism

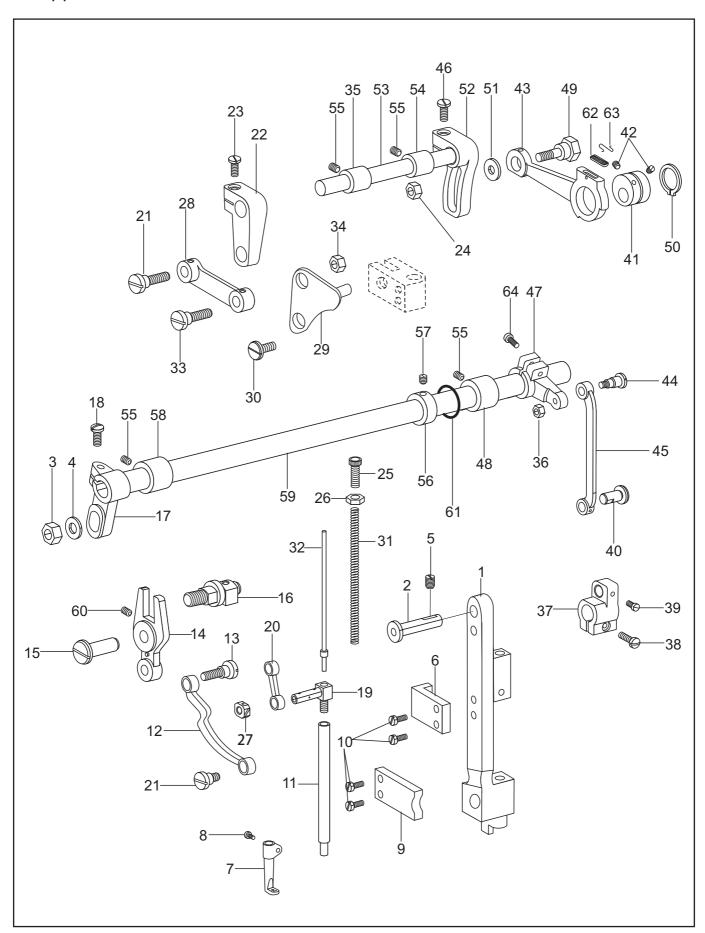

5. Upper feed mechanism


No.	per feed mechani Part Number	Name	Qt.	Remark
1	6WF5-001	Needle bar rocking frame	1	
2	35T5-504	Shaft, n/b rocking frame	1	
3	7WF5-003	Nut	1	
4		Washer	1	GB/T95 6
5	J0.0.40	Screw	1	
6	6WF5-002		1	
7	35T5-502	Guider	1	
8	22T2-004	Walking foot	1	
9	35T5-511	Screw	1	
10 11	22T2-019	block	4	
12	35T5-509 251WF3-001	Screw		
13	7WF5-011	Presser bar, walking foot		
14	7WF5-012	Link	1	
15	7WF5-013	Screw	1 1	
16	7WF5-014A	Crank	1	
17	233WF5-023	Pin shaft	1	
18	1WF4-032	Stud shaft assy.	2	
19	35T5-508	· ·	1	
20	35T5-507	Feed rocking arm crank, L	1	
21	34T5-507	Screw	2	
22	34T5-535	Connector	1	
23 24	34T5-540 7WF5-050	Link		
25	35T5-503	Screw		
26	34T5-503	Feed lifting arm crank, L	1	
27	33T1-013	Screw	1	
28	251WF3-002	Nut	1	
29	35T5-506	Screw	1	
30	34T5-527	Nut	1	
31	35T5-501		1	
32	35T5-505	Block	1	
33	34T5-513b	Link	1	
34	34T5-508	Crank	1	
35	251WF3-004	stud		
36 37	7WF5-022 5WF4-002	Spring, compression		
38	61-04-01/B504	Guide bar		
39	36T5-008E ₅	Screw	1	
40	5WF4-001	Nut	1	
41	7WF5-032	Bush, L	1	
42	22T2-005B ₃	Nut	2	
43	7WF5-034	Feed rocker arm	1	
44	7WF5-037		1	
45	7WF5-038	Screw	1	
46	7WF5-039	Set screw	1	
47 48	241WF3-003	Stud	1 1	
48	241WF3-005 7WF5-042	Eccentric wheel	1 1	
50	1 VVI J-U42	Screw	1	GB894.1 25
51	7WF5-049	Connecting rod	1	JD007.1 20
52	7WF5-043	Shoulder screw	1	
53	251WF3-003	Connecting rod	1	
54	7WF5-045	Shoulder screw	1	
55	61-04-01/B308	Feed rocking arm crank, R	3	
56	22T3-002B ₁	_	1	
57	22T3-002B ₂	Bush, M	2	
58	1KT2-004	Screw	1	
59	241WF3-004	Retaining ring, C	1	
60	7WF5-048	Washer	1	
61 62	233WF3-033 7WF5-035	Feed arm	1 1	
63	1WF5-035	Feed lifting shaft		
64	16WF3-061	Bush, R	1	
٠. ا		Screw		

Collar -27-

Bush, L

Unner feed shaft


6. Hook mechanism

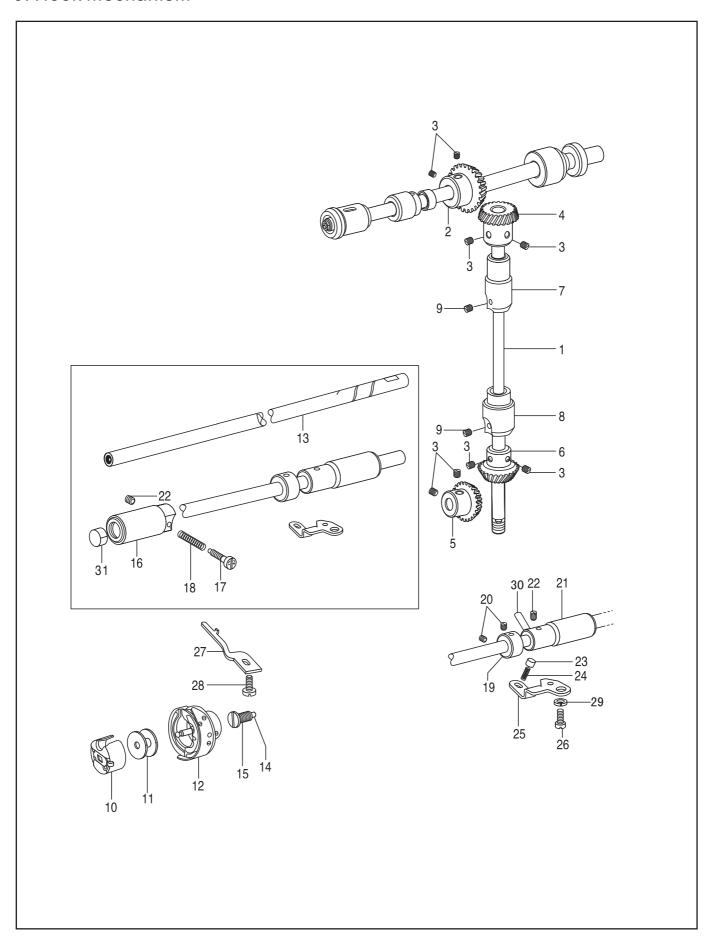

6. Hook mechanism

1 15WF1-001 Vertical shaft 1 2 ZOA140379 Bevel gear, upper shaft 1 3 22TZ-005B3 Set screw 8 4 ZOA140380 Bevel gear, vertical shaft, U 1 5 ZOA140382 Bevel gear, lower shaft 1 6 ZOA140382 Bevel gear, vertical shaft, L 1 7 2KT1-015 Bush, vertical shaft, U 1 8 2KT1-008 Bush, vertical shaft, L 1 9 J0.0.40 Screw 2 10 92WF1-002 Bobbin case 1 11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 36T4-008D1 Lower shaft 1 14 22T4-001A1a1 Screw 1 15 22T4-001A1a2 Filter 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting spring 1 19	No.	Part Number	Name	Qt.	Remark
2 ZOA140379 Bevel gear, upper shaft 1 3 22T2-005B3 Set screw 8 4 ZOA140380 Bevel gear, vertical shaft, U 1 5 ZOA140383 Bevel gear, vertical shaft, L 1 6 ZOA140382 Bevel gear, vertical shaft, L 1 7 2KT1-015 Bush, vertical shaft, U 1 8 2KT1-008 Bush, vertical shaft, L 1 9 J0.0.40 Screw 2 10 92WF1-002 Bobbin case 1 11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 3674-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1	1	15WF1-001	Vertical shaft	1	
4 ZOA140380 Bevel gear, vertical shaft, U 1 5 ZOA140383 Bevel gear, lower shaft 1 6 ZOA140382 Bevel gear, vertical shaft, L 1 7 2KT1-015 Bush, vertical shaft, U 1 8 2KT1-008 Bush, vertical shaft, L 1 9 J0.0.40 Screw 2 10 92WF1-002 Bobbin case 1 11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 36T4-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Scre	2	ZOA140379	Bevel gear, upper shaft	1	
5 ZOA140383 Bevel gear, lower shaft 1 6 ZOA140382 Bevel gear, vertical shaft, L 1 7 2KT1-015 Bush, vertical shaft, U 1 8 2KT1-008 Bush, vertical shaft, L 1 9 J0.0.40 Screw 2 10 92WF1-002 Bobbin case 1 11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 3674-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-008 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1	3	22T2-005B3	Set screw	8	
6 ZOA140382 Bevel gear, vertical shaft, L 1 7 2KT1-015 Bush, vertical shaft, U 1 8 2KT1-008 Bush, vertical shaft, L 1 9 J0.0.40 Screw 2 10 92WF1-002 Bobbin case 1 11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 36T4-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 <	4	ZOA140380	Bevel gear, vertical shaft, U	1	
7 2KT1-015 Bush, vertical shaft, U 1 8 2KT1-008 Bush, vertical shaft, L 1 9 J0.0.40 Screw 2 10 92WF1-002 Bobbin case 1 11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 36T4-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27	5	ZOA140383	Bevel gear, lower shaft	1	
8 2KT1-008 Bush, vertical shaft, L 1 9 J0.0.40 Screw 2 10 92WF1-002 Bobbin case 1 11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 36T4-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2K	6	ZOA140382	Bevel gear, vertical shaft, L	1	
9 J0.0.40 Screw 2 10 92WF1-002 Bobbin case 1 11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 36T4-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 29	7	2KT1-015	Bush, vertical shaft, U	1	
10 92WF1-002 Bobbin case 1 11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 36T4-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 30	8	2KT1-008	Bush, vertical shaft, L	1	
11 24WF2-001 Bobbin 1 12 122WF3-002 Hook assy. 1 13 36T4-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2	9	J0.0.40	Screw	2	
12 122WF3-002 Hook assy. 1 13 36T4-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	10	92WF1-002	Bobbin case	1	
13 36T4-008D1 Lower shaft 1 14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	11	24WF2-001	Bobbin	1	
14 22T4-001A1a2 Filter 1 15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	12	122WF3-002	Hook assy.	1	
15 22T4-001A1a1 Screw 1 16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	13	36T4-008D1	Lower shaft	1	
16 4WF1-005 Bush, lower shaft, L 1 17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	14	22T4-001A1a2	Filter	1	
17 22T4-005 Adjusting screw, oil 1 18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	15	22T4-001A1a1	Screw	1	
18 22T4-006 Adjusting spring 1 19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	16	4WF1-005	Bush, lower shaft, L	1	
19 22T4-002B1 Collar 1 20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	17	22T4-005	Adjusting screw, oil	1	
20 J0.0.35 Screw 2 21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	18	22T4-006	Adjusting spring	1	
21 4WF1-004 Bush, lower shaft, R 1 22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	19	22T4-002B1	Collar	1	
22 J0.0.5 Screw 2 23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	20	J0.0.35	Screw	2	
23 36T4-015 Plunger 1 24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	21	4WF1-004	Bush, lower shaft, R	1	
24 36T4-016 Spring 1 25 22T4-010 Holder plate 1 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	22	J0.0.5	Screw	2	
25 22T4-010 Holder plate 1 GB93 6 26 22T9-006 Screw 1 27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	23	36T4-015	Plunger	1	
25	24	36T4-016	Spring	1	00000
27 2KT1-013 B/case holder position bracket 1 28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	25	22T4-010	Holder plate	1	GB93 6
28 22T4-015 Screw 1 29 Washer 1 30 22T4-007C2 Oil tube 1	26	22T9-006	Screw	1	
29 Washer 1 30 22T4-007C2 Oil tube 1	27	2KT1-013	B/case holder position bracket	1	
30 22T4-007C2 Oil tube 1	28	22T4-015	Screw	1	
	29		Washer	1	
31 22T4-003 Oil seal 1	30	22T4-007C2	Oil tube	1	
	31	22T4-003	Oil seal	1	


7. Lubrication mechanism

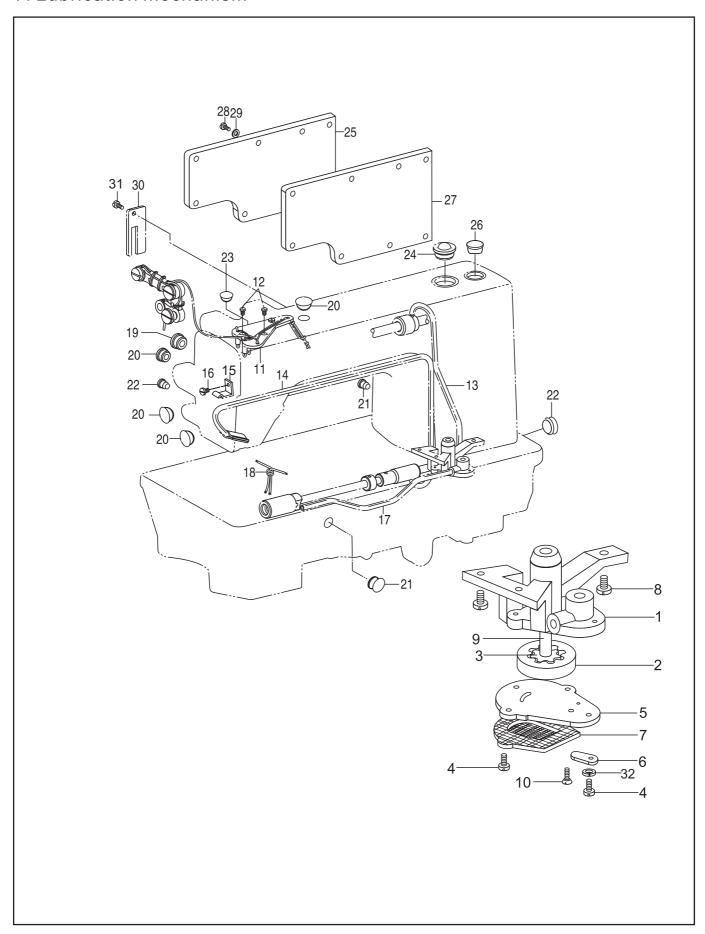

7. Lubrication mechanism

No.	Part Number	Name	Qt.	Remark
1	15WF4-003	Pump body	1	
2	15WF4-006	Big gear, pump	1	
3	15WF4-007	Small gear, pump	1	00/707.140
4		Screw	3	GB/T67 M3×10
5	15WF4-004	Cover	1	
6	22T8-007	Throat plate	1	
7	22T8-008A	Filter set	1	
8	22T8-009	Screw	3	CD/TC0 M240
9	15WF4-005	Shaft	1	GB/T68 M3×10
10		Screw	2	
11	7WF4-016	Setting plate	1	
12	22T8-012	Screw	2	
13	22T8-013D	Oil tube, U	1	
14	242WF1-004	Tube assy.	1	
15	22T8-016	Tube carrier	1	
16	20T4-006	Screw	1	
17	4WF4-005A	Oil tube, L	1	
18		Oil wick	1	
19	22T1-003C3	Rubber cap	1	
20	22T1-003C4	Rubber cap	4	
21	22T1-015	Rubber cap	2	
22	22T1-016	Rubber cap	1	
23	22T1-017	Rubber cap	1	
24	22T1-008	Oil gauge window	1	
25	241WF1-005	Back cover	1	
26	13WF2-035	Rubber cap	1	
27	241WF1-006	Packing	1	GB93 4
28	22T1-006	Screw	8	
29	22T1-007	Washer	8	
30	7WF4-011	Oil stopper	1	
3 1	33T3-006	Screw	1	
32		Washer	1	

8. Accessories

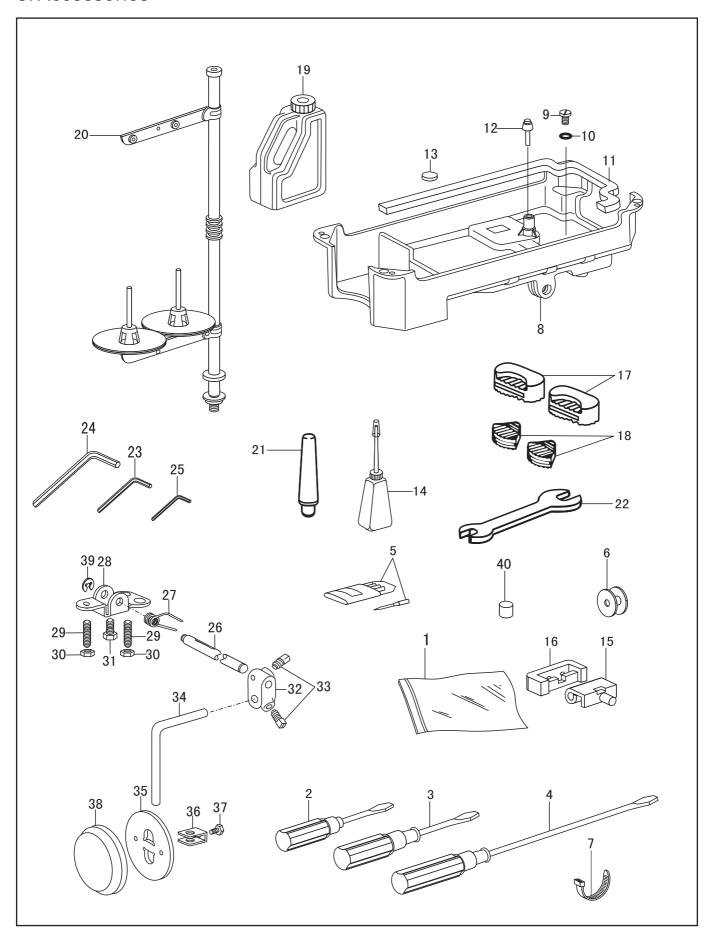

8. Accessories

No.	Part Number	Name	Qt.	Remark
1	33TF-010	Accessory bag	1	
2	33TF-014	Screw driver, S	1	
3	33TF-013	Screw driver, M	1	
4	33TF-012	Screw driver, L	1	DPX17 23#
5		Needle	4	DPXII 25#
6	24WF2-001	Bobbin	3	
7	129WF1-016	Band	3	
8	4WF5-001	Oil pan	1	
9	22T9-001A2	Screw	1	
10	22T9-001A3	Washer	1	
11	2KT9-008	Packing, oil pan	1	
12	4WF5-002	Lifter bar, knee	1	
13	22T9-012	Magnet	1	
1 4	33TF-011	Oil pot	1	
1 5	22T9-007F1	Head hinge	2	
1 6	22T9-007F2	Cushion, head hinge	2	
17	1KT5-004	Head cushion, L	2	
18	1KT5-003	Head cushion, S	2	
1 9	1F-012	Oil tank	1	0.0D/T5050.4000
2 0	4F-007	Thread stand assy.	1	2 GB/T5356-1998 3 GB/T5356-1998
2 1	1KT5-007	Head rest	1	2.5 GB/T5356-1998
2 2		Wrench	1	2.0 00/10000-1000
2 3		Wrench, 2mm	1	
2 4		Wrench, 3mm	1	
2 5		V-belt	1	
2 6	22T9-001A6	Lifter shaft	1	
2 7	22T9-001A7	Spring	1	
2 8	22T9-001A8	Bracket	1	GB/T5781 M8×12 M8×20
2 9	22T9-001A9	Adjusting screw	2	
3 0	22T9-001A10	Adjusting nut	2	
3 1	22T9-036	Screw	1	
3 2	22T9-003B3	Bracket	1	
3 3		Screw	1	GB896 9
3 4	22T9-003B2	Lifter bar	1	Ф8×3.5
3 5	22T9-003B5	Knee lifter plate	1	
3 6	22T9-003B6	Stopper	1	
3 7	22T9-003B7	Screw	1	
3 8	22T9-003B8	Cover, K-lifter plate	1	
3 9		Retaining ring	1	
4 0		Safety switch magnet	1	

GC0617D



This machine may only be operated by adequately trained operators only after having completely read and understood the instruction manual.

Parts are subject to changes in design without prior notice.







VETRON TYPICAL EUROPE GmbH

Clara-Immerwahr-Str. 6 67661 Kaiserslautern, Germany Tel.: +49 6301 320 75-0

Fax: +49 6301 320 75-11

info@vetrontypical.com www.vetrontypical.com